

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED / ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		ATTORNEY'S DOCKET NUMBER P67278US0
		US APPLICATION NO. (if known) 35 CFR 1.51 09/926441
INTERNATIONAL APPLICATION NO. PCT/NZ00/00068	INTERNATIONAL FILING DATE 5 May 2000	PRIORITY DATE CLAIMED 5 May 1999
TITLE OF INVENTION STEP OR BRACKET DEVICE		
APPLICANT(S) FOR DO/EO/US Bruce Raymond MACKINNON		


Applicant herein submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information.

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for Internatl. Preliminary Examination was made by the 19th month from earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the Internatl. Preliminary Examination report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:

International Search Report
PCT Request Form
First Page of Publication
International Preliminary Examination Report - with annexes

US APPLICATION NO. (If known, see 37 CFR 1.5) <div style="font-size: 1.5em; font-weight: bold;">09/926441</div>		INTERNATIONAL APPLICATION NO <div style="font-weight: bold;">PCT/NZ00/00068</div>		ATTORNEY'S DOCKET NUMBER <div style="font-weight: bold;">P67278US0</div>	
17. <input checked="" type="checkbox"/> The following fees are submitted: Basic National Fee (37 CFR 1.492(a)(1)-(5)): Internatl. prelim. examination fee paid to USPTO (37 CFR 1.492 (a) (1)) .. \$710.00 No international preliminary examination fee paid to USPTO (37 CFR 1.492 (a) (2)) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) .. \$740.00 Neither international preliminary examination fee (37 CFR 1.492 (a) (3)) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO) \$1040.00 International preliminary examination fee paid to USPTO (37 CFR 1.492 (a) (4)) and all claims satisfied provisions of PCT Article 33(2)-(4) \$100.00 Search Report prepared by the EPO or JPO (37 CFR 1.492 (a) (5)) \$890.00 <div style="text-align: right; font-weight: bold;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div>				CALCULATIONS	PTO USE ONLY
				\$ 1040.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$ 130.00	
Claims	Number Filed	Number Extra	Rate		
Total Claims	21 - 20 =	-1-	x \$18.00	\$ 18.00	
Independent Claims	5 - 3 =	-2-	x \$84.00	\$ 168.00	
Multiple Dependent Claim(s) (if applicable)			+ \$280.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$ 1356.00	
Reduction by 1/2 for filing by small entity , if applicable. Verified Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28).				\$	
SUBTOTAL =				\$ 1356.00	
Processing fee of \$130 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f))				\$	
TOTAL NATIONAL FEE =				\$ 1356.00	
Fee of \$40.00 for recording the enclosed assignment (37 CFR 1.21(h)). Assignment must be accompanied by appropriate cover sheet (37 CFR 3.28, 3.31).				\$	
TOTAL FEES ENCLOSED =				\$ 1356.00	
				Amt. to be refunded:	\$
				Amt. charged:	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>1356.00</u> to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. <u>06-1358</u> in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge my account any additional fees set forth in §1.492 during the pendency of this application, or credit any overpayment to Deposit Account No. <u>06-1358</u> . A duplicate copy of this sheet is enclosed.					
SEND ALL CORRESPONDENCE TO: <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> JACOBSON HOLMAN PLLC 400 7th Street, N.W., Suite 600 Washington, DC 20004 202-638-6666 CUSTOMER NUMBER: 00136 </div> <div style="width: 45%; text-align: right;"> By <u></u> John C. Holman Reg. No. 22,769 </div> </div>					

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Bruce Raymond MACKINNON

Serial No.: New

Filing Date: November 5, 2001

For: STEP OR BRACKET DEVICE

PRELIMINARY AMENDMENT

Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to initial examination, please amend the above-identified application as follows:

IN THE SPECIFICATION

On page 1, immediately following the title, please insert the following sentence: --This is a nationalization of PCT/NZ00/00068 filed May 5, 2000 and published in English.--

IN THE CLAIMS

Please amend claims 4, 6, 8, 9, 11, 12, 17 & 18 as follows:

4. (amended) A bracket device according to claim 1 wherein said attachment means extends from an opening in said proximal end of said operating member, and is slidable in a direction into or out of said proximal end.

6. (amended) A bracket device according to claim 1, wherein said attachment means is terminated with a hook which in use engages within an aperture provided in a wall of said thin walled section.

8. (amended) A bracket device according to claim 2, wherein said locking means is a wedge member and a slot is provided in said wedge member which in use substantially straddles said attachment means.

9. (amended) A bracket device according to claim 2, wherein said wedge member includes a channel adapted to encompass said flange portion of said main member.

11. (amended) A bracket device according to claim 1, wherein said operating member is a step for attachment to a utility pole having a thin wall section.

12. (amended) A bracket device according to claim 1, wherein said operating member is a suspension bracket for suspending hardware from a utility pole having a thin wall section.

17. (amended) A main member for a bracket device according to claim 1.

18. (amended) A wedge member for a bracket device according to claim 2.

Please cancel omnibus claims 22 and 23 without prejudice or disclaimer.

REMARKS

The foregoing Preliminary Amendment is requested in order to delete the multiple dependent claims and avoid paying the multiple dependent claims fee.


Attached hereto is a marked-up version of the changes made to the specification and claims by the current amendment. The attached page is captioned "**VERSION WITH MARKINGS TO SHOW CHANGES MADE.**"

Early action on the merits is respectfully requested.

Respectfully submitted,

JACOBSON HOLMAN PLLC

By


John C. Holman
Reg No. 22,769

400 Seventh Street, N.W.
Washington, D.C. 20004-2201
(202) 638-6666

Atty. Docket: P67278US0
Date: November 5, 2001
JCH/cmf

VERSION WITH MARKINGS TO SHOW CHANGES MADE

IN THE CLAIMS

4. (amended) A bracket device according to claim 1 [either claim 1 or claim 2] wherein said attachment means extends from an opening in said proximal end of said operating member, and is slidable in a direction into or out of said proximal end.

6. (amended) A bracket device according to claim 1 [any one of claims 1 to 5], wherein said attachment means is terminated with a hook which in use engages within an aperture provided in a wall of said thin walled section.

8. (amended) A bracket device according to claim 2 [any one of claim 2 through claim 7], wherein said locking means is a wedge member and a slot is provided in said wedge member which in use substantially straddles said attachment means.

9. (amended) A bracket device according to [any one of claim 2 and claim 3 through claim 8 when dependant on] claim 2, wherein said wedge member includes a channel adapted to encompass said flange portion of said main member.

11. (amended) A bracket device according to claim 1 [any one of claim 1 through claim 10], wherein said operating member is a step for attachment to a utility pole having a thin wall section.

12. (amended) A bracket device according to claim 1 [any one of claim 1 through claim 10], wherein said operating member is a suspension bracket for suspending hardware from a utility pole having a thin wall section.

17. (amended) A main member for a bracket device according to claim 1 [any one of claim 1 through claim 12].

18. (amended) A wedge member for a bracket device according to claim 2 [any one of claim 2 through claim 12].

5/pts

STEP OR BRACKET DEVICE

TECHNICAL FIELD

This invention relates to an easily installed removeable bracket device incorporating for example an operating member such as a step or a suspension bracket
5 for attachment to a steel utility pole, a concrete utility pole incorporating a thin wall section for bracket attachment, or other thin wall section structures.

BACKGROUND ART

Conventional utility poles are manufactured using one of two alternative constructions. Historically they have been either hard or soft wood poles, but with
10 modern manufacturing techniques thin wall steel poles are also becoming more common. The majority of such poles are employed in either telecommunications or electrical power transmission.

In order to fix faults or to assess the condition of attachments at the top of the pole, it is often necessary for servicemen to scale the pole and work near the top. In the
15 case of a steel pole this can be accomplished in one of two ways: either by use of a ladder, or by use of steps integrated with the pole itself. The disadvantage to using ladders is that they can be unstable and sometimes not long enough. Therefore the risk of falling from the pole is higher. With wooden poles the use of ladders or the provision of steps is not necessary, because the servicemen are generally able to scale the pole
20 using clamp-ons and a safety strap.

Increasingly suppliers are requesting that steel pole manufacturers supply their poles with steps already attached, in order to avoid the problems associated with ladders. From the manufacturers perspective this poses a difficulty, due to the additional cost associated with integrating steps with the pole. Typically this may add
25 up to 20% or more to the production cost of a 40 foot distribution pole, thus putting the steel pole manufacturers at a distinct disadvantage to their wood pole counterparts.

The alternatives for attaching pole steps range from a nut welded to the side of the pole, to a complicated four piece arrangement, shown in FIG. 1, involving a shaped washer 1, a shaped bolt 2, a welded or riveted nut 3 and a pressed steel step 4. These
30 arrangements are hardly ideal, they are often very unstable, and in some cases are quite unsafe to work on. Also as previously mentioned, a part, that is the nut 3 part, needs to be attached to each pole when manufactured, adding additional costs, and thereby reducing profit margins.

Moreover, there is also a need for bracket devices incorporating an operating member such as, a suspension bracket which is used for example for suspending fiber optic cables, or some other type of line hardware fitting, which can be easily installed and removed from steel utility poles, concrete utility poles incorporating a thin wall section for bracket attachment, or other thin wall section structures.

DISCLOSURE OF THE INVENTION

The object of this invention is to provide an easily installed removeable bracket device incorporating an operating member such as a step or suspension bracket that overcomes the abovementioned disadvantages.

10 In one aspect, the present invention may be broadly said to consist in a bracket device for attachment to a thin walled section which comprises: a main member having an operating member, and an attachment device extending from a proximal end of the operating member which in use engages with the thin walled section, and a locking
15 device associated with the attachment device which slides in relation to the attachment device to a locking position to create a reaction force between the attachment device and the thin walled section.

The locking device may comprise any suitable device whereby a reaction force can be created between the attachment device and the thin walled section. For example this may comprise a cam device which is operated by a lever to actuate a cam to
20 provided the reaction force.

Preferably the main member has a flange portion with the attachment device extending therefrom, and the locking device is a wedge member which is adapted in use to abut against a face of the flange portion.

Preferably the attachment device is terminated with a hook which in use engages
25 within an aperture provided in a wall of the thin walled section.

Preferably an extremity of the hook is adapted to abut an inner wall of the thin walled section, and the wedge member is adapted when in the locking position to abut against an outer wall of the thin walled section to thereby create a compressive force between the hook and the wedge member to hold the operating member in place.

30 Preferably a slot is provided in the wedge member which in use substantially straddles the attachment device.

Preferably the slot is in the form of an enclosed slot.

Preferably an innermost face of the wedge member is substantially "V" shaped.

Alternatively an innermost face of the wedge member is substantially cylindrically concaved.

In a further alternative an innermost face of the wedge member is substantially

5 flat.

Preferably the wedge member includes a channel adapted to encompass the flange portion of the main member.

More preferably the wedge member is substantially symmetrical with the channel formed concave matching the opposite side, and the abutting face of the flange
10 portion of the main member is formed as a complementary convex face.

Alternatively the proximal end of the operating member includes a lower portion which in use locks into the slot to create a reaction force against any rotational torque on the operating member.

Preferably the operating member and the attachment device are constructed of
15 forged steel.

Alternatively the operating member and the attachment device are constructed of forged aluminum.

Depending on requirements the operating member and the attachment device may be constructed of cast iron or steel or aluminum.

20 In a second aspect the present invention may be broadly said to consist in a method of providing a bracket device for a thin wall section comprising the steps:

a) forming an aperture in the wall of the thin wall section at a position corresponding to a desired location of a bracket device, and

25 b) forming a main member having an operating member and an attachment device extending from a proximal end of the operating member which in use engages within the aperture and which includes a locking device associated with the attachment device which slides in relation to the attachment device to a locking position to in use secure the attachment device within the aperture.

30 With the present invention as described above, the bracket device can be easily installed and removed from a thin wall section in which a suitable aperture has been

formed. Moreover, the locking device ensures that this is stably secured in place.

The thin wall section may be part of any structure to which it is desired to removably attach a bracket device.

For example this may be part of a steel utility pole, or a thin wall section
5 incorporated into a concrete utility pole. In this case the operating member may be in the form of a step for supporting a foot of a person wishing to climb the utility pole. Alternatively the operating member may be in the form of a suspension bracket for suspending hardware from the utility pole.

This invention may also be said broadly to consist in the parts, elements and
10 features referred to or indicated in the specification of the application, individually or collectively, and any or all combinations of any two or more of said parts, elements or features, and where specific integers are mentioned herein which have known equivalents in the art to which this invention relates, such known equivalents are deemed to be incorporated herein as if individually set forth.

15 The invention consists in the foregoing and also envisages constructions of which the following gives examples.

BRIEF DESCRIPTION OF THE DRAWINGS

Further aspects of the present invention will become apparent from the ensuing
description which is given by way of example only and with reference to the
20 accompanying drawings in which;

FIG. 1 is an illustration of a prior art step;

FIG. 2 is an illustration of a steel utility pole with pole steps attached;

FIG. 3 is a cut-away view showing a pole step of FIG. 2 attached to the steel
utility pole with a wedge member fitted in place;

25 FIG. 4a is a plan view of the wedge member;

FIG. 4b is a side view of the wedge member;

FIG. 4c is a frontal view of the wedge member viewed from the pole side;

FIG. 5 is a plan view of an alternative wedge member;

FIG. 5a is a perspective view of another alternative wedge member;

FIG. 6a is a plan view of the wedge member in a second embodiment;

FIG. 6b is a frontal view of the wedge member in the second embodiment;

FIG. 7 is a side view of a step of the second embodiment;

FIG. 8 is a side view of a step of a third embodiment; and

- 5 FIG. 9 is perspective views showing attachment devices according to the present invention having various operating members.

BEST MODE FOR CARRYING OUT THE INVENTION

The invention as principally described in the preferred embodiments is a pole
step for attachment to a steel utility pole which is able to be easily attached to and
10 removed from the pole as and when required. The step is locked in place once attached,
using a wedge member to ensure that it provides a secure and firm platform from which
servicemen can work. The wedge member may be adapted to fit any shape of utility
pole, and be repeatably attached and removed by servicemen each time they need to
scale a pole.

- 15 A typical steel utility pole 1, shown in FIG. 2, is used by utilities to carry their
wires 2. Steps 3 are spaced at even intervals to allow the servicemen (not shown) to
scale the pole 1 to a point where the serviceman can work on attachments 4 at the top
of the pole 5. Steps are not provided on the lower section of the pole so as to stop
passers-by from being able to scale the pole 1. The servicemen will scale a first step 6
20 using a ladder (not shown) or some other climbing means.

The pole step 3, as shown in more detail in FIG. 3, is designed to be removably
attached to the pole 1. The step 3 is comprised of a main member generally indicated
by arrow 5 having a tapered support surface 10 (operating member) for the servicemen
to stand on while climbing the pole 1 or while working on the attachments 4. Integral
25 with the support surface 10 is a hook 11 (attachment device) which is leverably inserted
into a hole 12 in the exterior of the pole 1 and which provides an opposing force to hold
the step 3 in place. The support surface 10 is terminated at its distal end with a lip 13
to prevent the footwear of the serviceman from slipping off the edge of the support
surface 10. The main member 5 including the support surface 10 and the integral hook
30 11 may be constructed either from cast aluminum, cast SG iron, forged steel or any
other robust material.

A wedge member 20 is designed such that once the hook 11 has been inserted

into the interior of the pole 1, the wedge member 20 can be inserted between the exterior 21 of the pole 1 and a flange portion 22 of the main member 5. Once inserted the wedge member 20 will lock the main member 5 in place providing firm vertical and horizontal support such that any servicemen will be assured a safe working platform.

- 5 The wedge member 20, shown in more detail in FIGS. 4a, 4b and 4c is tapered on two sides 30, 31 and on one face 32. Looking towards the pole, shown in FIG. 4c, the wedge member 20 sides 30 and 31 are tapered, being widest at a lowermost portion 33 and narrowest at an uppermost portion 34. This can be seen in more detail in FIG. 4a. Looking now from the side shown in FIG. 4b (parallel to the side of the face of the
- 10 pole 1), the outermost faces 32 and 35 of the wedge member 20 are tapered, being widest at the uppermost portion 34 and narrowest at the lowermost portion 33.

- Preferably the taper angle between the outermost faces 32 and 35 of the wedge member 20 is such as to give a wedge angle of from 3.5 to 5 degrees. This is to ensure self locking of the wedge member 20 when, after the hook 11 is inserted into the hole
- 15 12, the wedge member 20 is dropped and firmly seated in place from above. Moreover, the contact faces 32 and 35 of the wedge member 20 and/or the contact face of the flange portion 22 may be formed with a roughened or serrated surface to enhance securement.

- Furthermore, as shown by the dotted lines in FIG. 4c, at the lowermost portion
- 20 33, a bridge portion 36 may be formed either integrally or attached, thus closing off a slot 51 (described later) to give an enclosed slot. Having such a bridge portion 36 has the advantage that the main member 4 and the wedge member 20 combination can be installed using only one hand. In this case, the hook 11 is first inserted through the central opening (slot 51) of the wedge member 20 to suspend the wedge member 20, and
- 25 is then inserted into the hole 12. The wedge member 20 can then be swung upwards through 180 degrees into position and dropped into place, and then tapped in tightly.

- Looking now from above, seen in FIG. 4a, the innermost face 40 of the wedge member 20 is substantially cylindrically concaved, with small flat sections 41 (shown dotted in FIG. 4a and 4c) on either side. The cylindrically concaved innermost face 40
- 30 is designed to adapt to circular poles, with the flat sections 41 provided for where the wedge member 20 faces a flat surface, for example larger poles with hexagonal or dodecanol faces. The innermost face 40 is tapered to match the typical shape of a conventional steel utility pole. For more reliable securement on larger poles with wide faces, an alternative wedge member, as shown in FIG. 5, can be used with a completely
- 35 flat innermost face 50.

To accommodate the shaft of the hook 11, the slot 51 is provided in the body of the wedge member 20. A channel 52 (also shown in dotted outline in FIG. 4c) is formed in the outermost face of the wedge member 20 to accommodate the flange portion 22 of the step 10, to ensure once in place, the step 10 cannot rotate out of its correct position. It should be noted that details of the edge of this channel 52 are omitted from FIG. 3, which effectively shows a section view.

The channel 52 may be formed as shown in FIG. 4a in a rectangular shape in cross-section in the case where the flange portion 22 of the step 10 is of a matching shape.

FIG. 5a shows an alternative wedge member generally indicated by arrow 54. Here the wedge member 54 comprises an outer face 55 (channel) formed as a concave shape (here a concave "V" shape) the same or approximately the same shape as an inner face 56, and having an enclosed slot with a bridge portion 57. In this case the face of the flange portion 22 of the main member 5, while not shown specifically, is formed as a matching convex surface (a convex "V" shape). With such an arrangement the wedge member 54 can be made symmetrical with the inner face 56 still adequately matching the typical shape of a conventional steel utility pole. Moreover, the engagement of the matching faces of the convex surface of the flange portion 22 and the concave surface of the outer face 55 ensures that once in place, the step 10 cannot rotate out of its correct position.

The wedge member 20 may be manufactured using SG iron, forged steel, injection molded plastic, aluminum or alternatively using rubber, or any other suitably robust material.

In a second embodiment, an alternative wedge member 61 is shown in FIG. 6a without tapering sides, and can be constructed using slightly less material than that described in the preceding embodiment for the wedge member 20. Looking now from above, an innermost face 60 of the wedge member 61 is substantially "V" shaped and substantially rectangular in outline. Looking from the pole side, shown in FIG. 6b the "V" is tapered to substantially match the typical shape of a conventional steel utility pole. The flat sections 62 are widest at the uppermost portion 63 and taper to nothing at the lowermost portion 64.

In the second embodiment, the step 70 shown in FIG. 7 is provided with a key portion 71 protruding from a flange portion 72 which is designed to fit into a slot 73 of the wedge member 61. Once locked in place, this prevents the step 70 from rotating, thus ensuring that the step 70 stays locked in place.

In a third embodiment shown in FIG. 8, a step 80, a hook 81 and a wedge member 82 are all movable relative to one another. With this embodiment the hook 81 is leverably inserted into a hole 83 in a steel utility pole 84, with the wedge member 82 in an upper position 85. The hook 81 has grooves 86 in both sides which the wedge member 82 engages with. With the hook 81 inserted into a hole 83 in the exterior of a pole 84, the wedge member 82 is brought to a lower locked position 87. The movement of the wedge member 82 causes the distal side 88 of the groove to experience a lateral force, effecting a compressive force on the wall of the pole 84 between an end of the hook 89 and a flange portion 90 of the step 80.

10 It will be apparent from the description that a step design such as that described will be equally applicable to any application which requires an object to be suspended from a thin wall hollow structure. Examples include the suspension of fiber optic cables and many other line hardware fittings.

FIG. 9 is perspective views showing various main members of attachment devices according to the present invention having various operating members. In these figures, parts having the same function as described for the previous attachment device are denoted by the same reference numerals and detailed description thereof is omitted.

FIG. 9a shows a main member 90 having a ring operating member 91.

FIG. 9b shows main member having 92 having a hook operating member 93.

20 FIG. 9c shows main member 94 having a tongue operating member 95.

FIG. 9d shows main member 96 having a clevis operating member 97.

FIG. 9e shows main member 98 having a ball eye operating member 99.

Aspects of the present invention have been described by way of example only and it should be appreciated that modifications and additions may be made thereto without departing from the scope of the invention as defined by the appended claims.

INDUSTRIAL APPLICABILITY

The bracket device of the present invention provides an easily installed removable bracket device incorporating an operating member such as a step or suspension bracket, which overcomes problems with conventional methods and devices for attaching a bracket to a thin walled section. The bracket device thus offers many possible industrial applications.

ART 34 AMD1

09/926441

CLAIMS

1. A bracket device for attachment to a thin walled section which comprises:

5 a main member having an operating member and attachment means extending from a proximal end of said operating member which in use engage said thin walled section through a single opening in said thin walled section, said main member having no other such attachment means and

10 locking means associated with said attachment means which is adapted to slide in relation to said attachment means to a locking position to create a reaction force between said attachment means and said thin walled section.

15 2. A bracket device according to claim 1, wherein said operating member has a flange portion, said attachment means extends from the proximal side of said flange portion, and said locking means is a wedge member which is adapted to abut against a face of said flange portion when in said locking position.

3. A bracket device according to claim 2 wherein said attachment means is integral with said flange portion.

20 4. A bracket device according either claim 1 or claim 2 wherein said attachment means extends from an opening in said proximal end of said operating member, and is slidable in a direction into or out of said proximal end.

25 5. A bracket device according to claim 3 wherein said locking means engages with a distal end of said attachment means such that in use said operating member proximal end separates said locking means and said thin walled section.

30 6. A bracket device according to any one of claims 1 to 5, wherein said attachment means is terminated with a hook which in use engages within an aperture provided in a wall of said thin walled section.

7. A bracket device according to claim 6, wherein an extremity of said hook is adapted to abut an inner wall of said thin walled section, and said wedge member is adapted when in

said locking position to abut against an outer wall of said thin walled section to thereby create a compressive force between said hook and said wedge member to hold said operating member in place.

5 8. A bracket device according to any one of claim 2 through claim 7, wherein said locking means is a wedge member and a slot is provided in said wedge member which in use substantially straddles said attachment means.

10 9. A bracket device according to any one of claim 2 and claim 3 through claim 8 when dependant on claim 2, wherein said wedge member includes a channel adapted to encompass said flange portion of said main member.

15 10. A bracket device according to claim 8, wherein said proximal end of said operating member includes a lower portion which in use locks into said slot to create a reaction force against any rotational torque on said operating member.

11. A bracket device according to any one of claim 1 through claim 10, wherein said operating member is a step for attachment to a utility pole having a thin wall section.

20 12. A bracket device according to any one of claim 1 through claim 10, wherein said operating member is a suspension bracket for suspending hardware from a utility pole having a thin wall section.

25 13. A step for attachment to a utility pole having a thin wall section which comprises:

a main member having a step member with a flange portion formed at a proximal end thereof, and attachment means extending from a face of said flange portion and terminated in a hook which in use engages within an aperture provided in a wall of said thin walled section, and

30

a wedge member which is adapted to slide in relation to said attachment means and abut against a face of said flange portion when in a locking position, to thereby create a

compressive force between said hook and said wedge member to hold said step member in place.

14. A step as claimed in claim 13 wherein said attachment means is integral with said flange portion and said wedge member interposes between said flange portion and said thin walled section and butts against said face of said flange portion from which said attachment means extends.

15. A step as claimed in claim 13 wherein said attachment means extends from an opening in said flange portion and is slidable in a direction into or out of said flange portion, and said wedge member engages with a distal end of said attachment means such that in use said wedge member abuts against a face of said flange portion facing away from said thin walled section, and said flange portion is interposed between said wedge member and said thin walled section.

16. A wedge member for a bracket device comprising a main body formed with an enclosed slot, and having an inner face and an outer face inclined relative to each other at an angle of from 3.5 to 5 degrees, said inner face and said outer face each being formed with a concave channel of substantially the same shape in cross section along a full length thereof,

17. A main member for a bracket device according to any one of claim 1 through claim 12.

18. A wedge member for a bracket device according to any one of claim 2 through claim 12.

19. A method of providing a bracket device for a thin wall section comprising the steps:

a) forming an aperture in the wall of said thin wall section at a position corresponding to a desired location of a bracket device, and

b) forming a main member having an operating member and attachment means extending from a proximal end of said operating member which in use engages within

said aperture and which includes locking means associated with said attachment means which slides in relation to said attachment means to a locking position to in use secure said attachment means within said aperture.

- 5 20. A method of fixing a bracket to a thin walled section including a single fixing hole comprising:
- 10 a) inserting an attachment means of a main member, having an operating member, and attachment means extending from a proximal end of operating member through said hole in said thin walled section, and
- 15 b) sliding a locking means relative to said attachment means to a locking position to create a reaction force between said attachment means and said thin walled section.
- 20 21. A method of fixing a bracket to a thin walled section as claimed in claim 20 wherein said attachment means is terminated with a hook and said step of inserting said attachment means through said hole in said thin walled section includes rotating said operating member about its proximal end to pass a transversely extending portion of said hook through said hole.
- 20 22. A bracket device substantially as described herein with reference to Figure 2 through Figure 9.
23. A method of providing a bracket device for a thin wall section substantially as described herein with reference to Figure 2 through Figure 9.

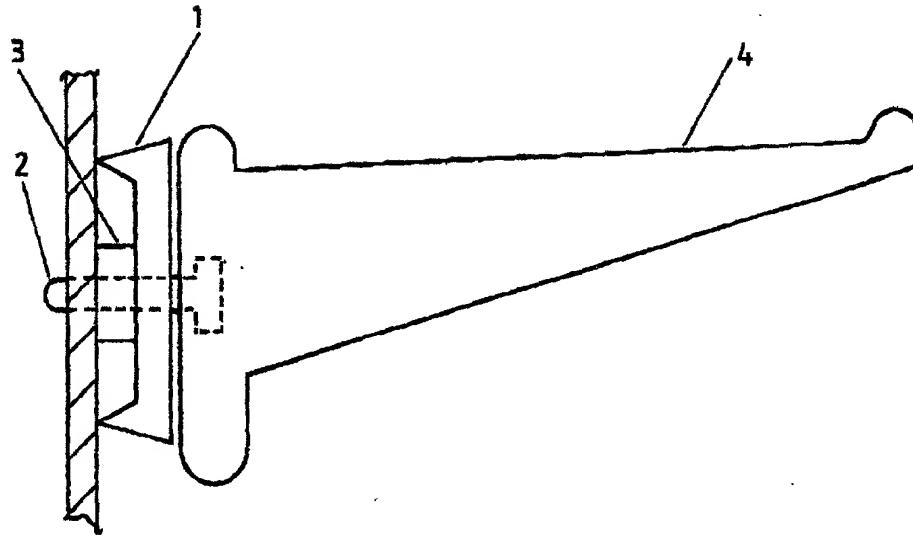


FIG. 1 (Prior Art)

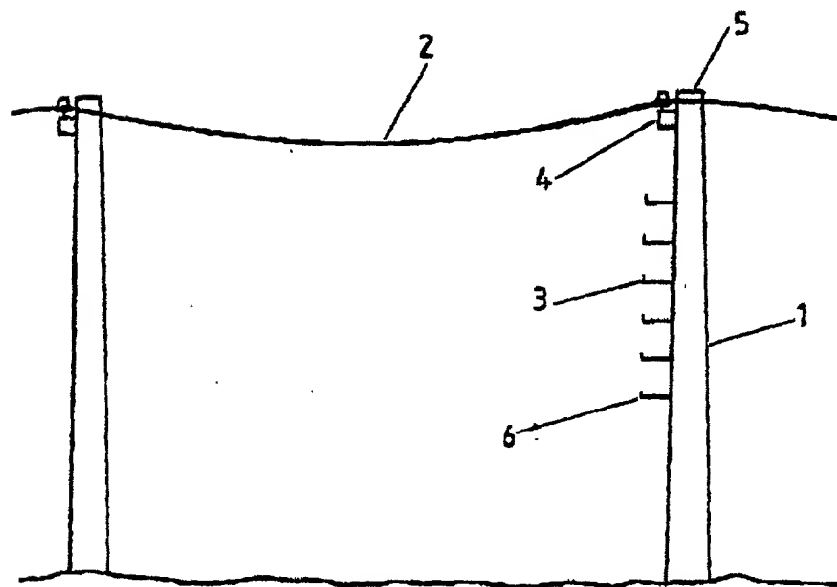


FIG. 2

FIG. 3

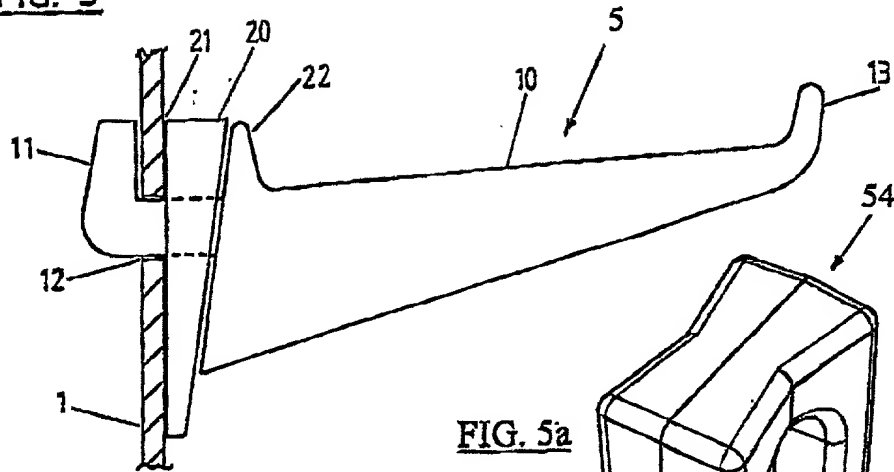


FIG. 4a

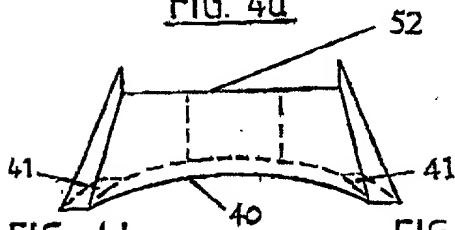


FIG. 4b

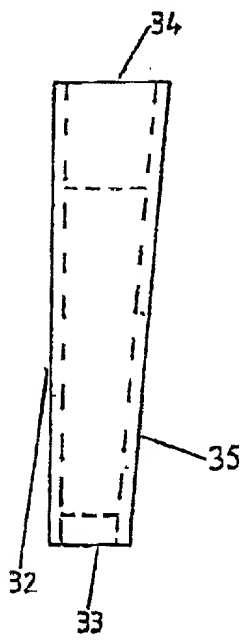


FIG. 4c

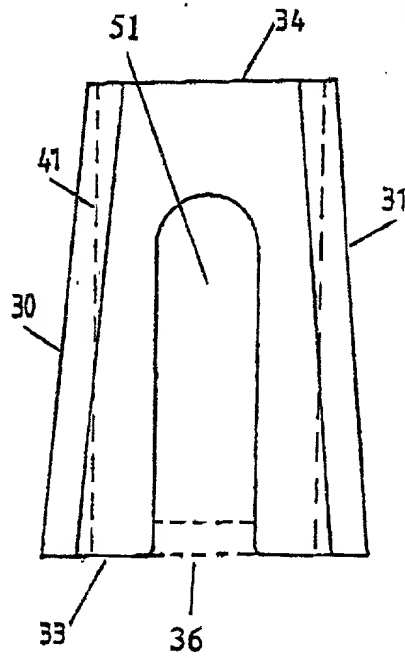


FIG. 5a

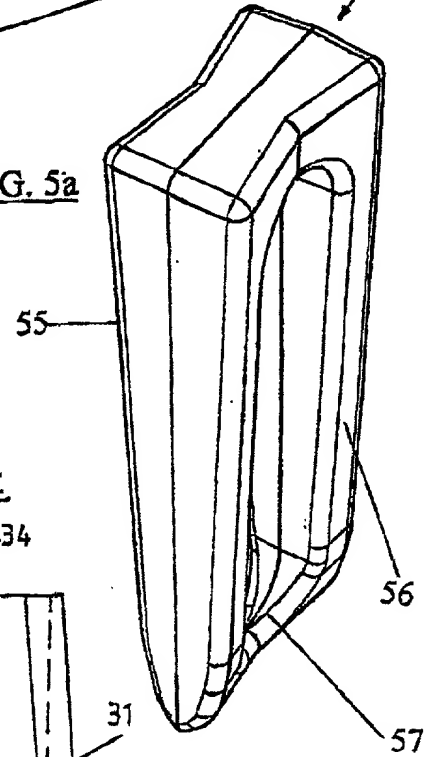



FIG. 5






FIG. 6a

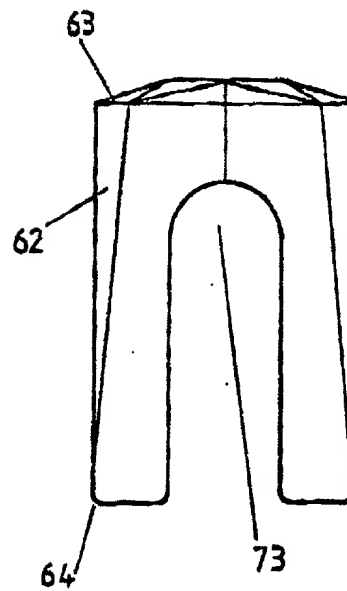


FIG. 6b

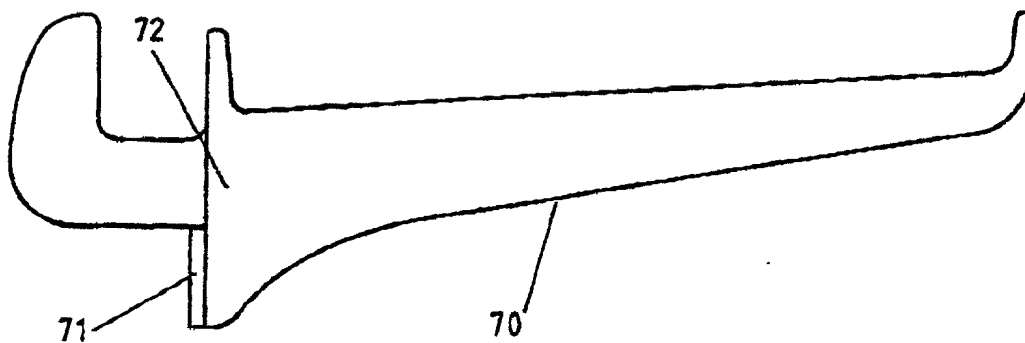


FIG. 7


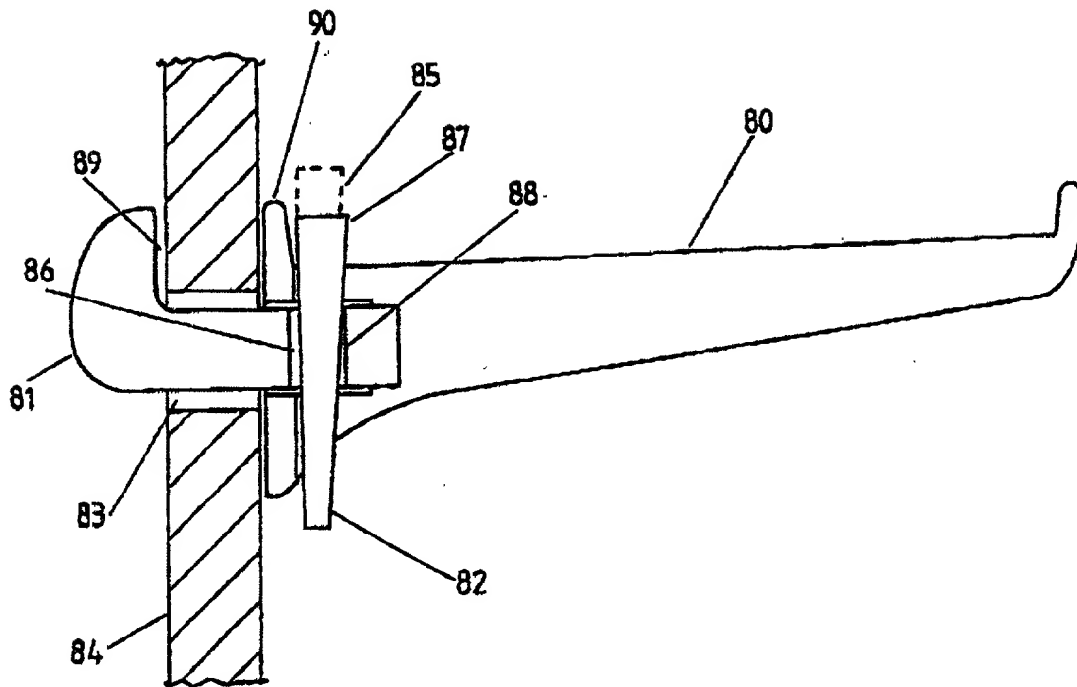
FIG. 8

FIG. 9

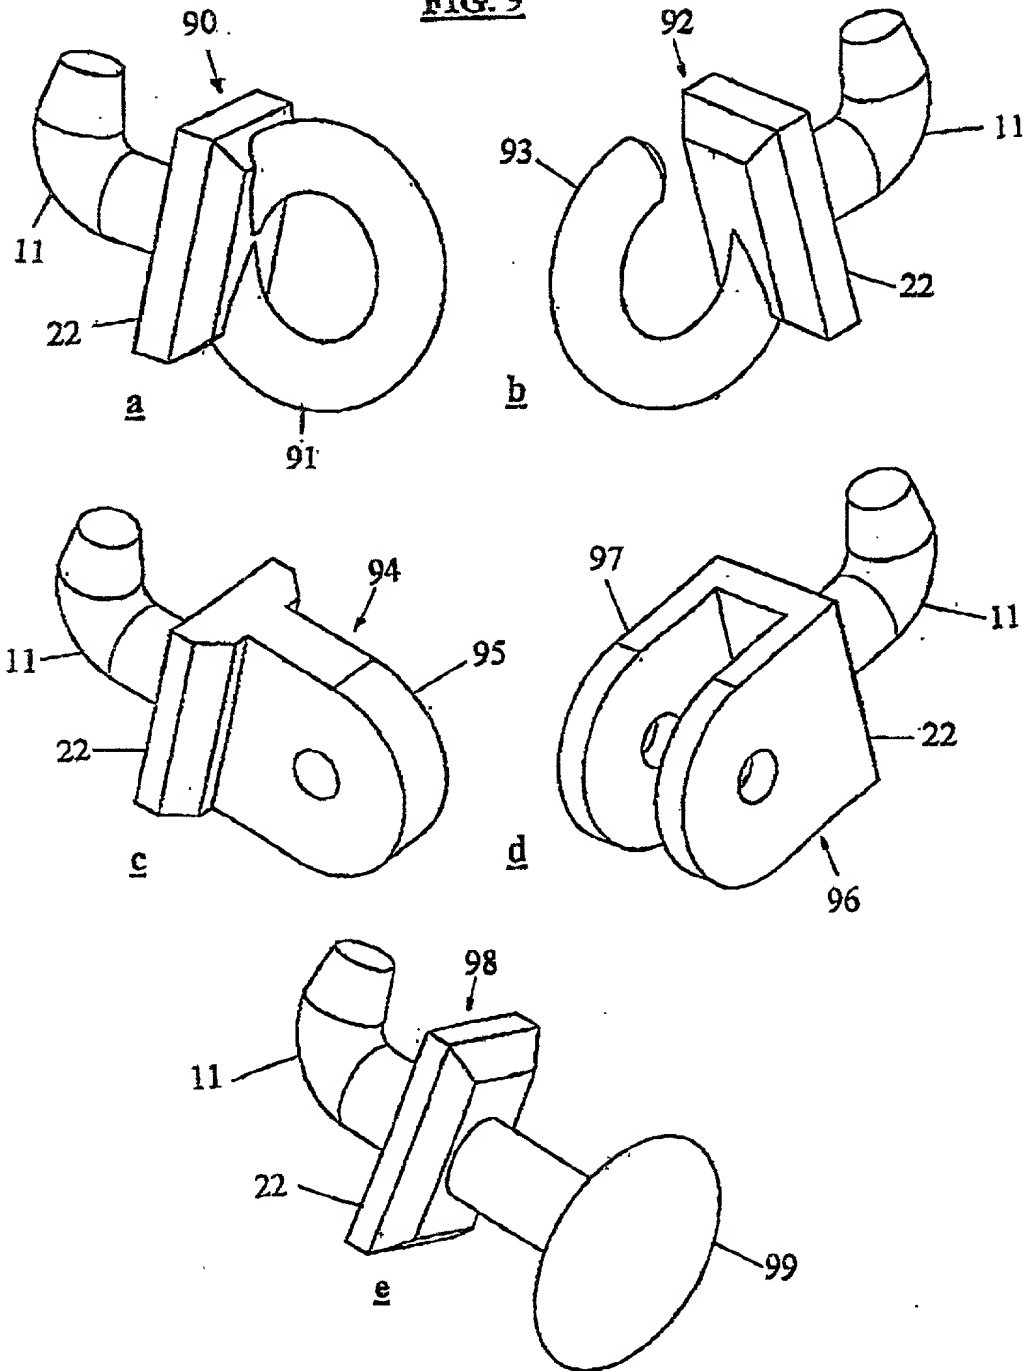

ALL PATENTS, INCLUDING DESIGN
FOR APPLICATION BASED ON PCT; PARIS CONVENTION;
NON PRIORITY; OR PROVISIONAL APPLICATIONS

**DECLARATION
AND POWER OF ATTORNEY
U.S.A.**

FOR ATTORNEY'S USE ONLY

ATTORNEY'S DOCKET NO.

As a below named inventor, I declare that my residence, post office address and citizenship are stated below next to my name, the information given herein is true, that I believe that I am the original, first and sole inventor (if only one name is listed at 201 below), or a first and joint inventor (if plural inventors are named below at 201-203, or on additional sheets attached hereto) of the subject matter which is claimed and for which patent is sought on the invention entitled:

STEP OR BRACKET DEVICE

which is described and claimed in: ☐ PCT International Application No. _____ filed _____
☐ the attached specification ☐ the specification in application _____ filed _____
(if applicable) and _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56. I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

335019

(Number)

New Zealand

(Country)

5 May 1999

(Day/Month/Year Filed)

(Number)

(Country)

(Day/Month/Year Filed)

(Number)

(Country)

(Day/Month/Year Filed)

Priority Claimed

☒ Yes

☐ No

☐ Yes

☐ No

☐ Yes

☐ No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

Application No. _____ Filing Date _____ Application No. _____ Filing Date _____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) _____ (Filing Date) _____ (Status: patented, pending, abandoned) _____

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys (Registration No.) to prosecute this application, receive and act on instructions from my agent, and transact all business in the Patent and Trademark Office connected therewith. HARVEY B. JACOBSON JR. (20,851); D. DOUGLAS PRICE (24,514); JOHN CLARKE HOLMAN (22,769); MARVIN R. STERN (20,640); MICHAEL R. SLOBASKY (26,421); JONATHAN T. SCHERER (29,851); IRWIN M. AISENBERG (19,007); WILLIAM E. PLAYER (31,409)

SEND CORRESPONDENCE TO:

JACOBSON, PRICE, HOLMAN & STERN
PROFESSIONAL LIMITED LIABILITY COMPANY
400 SEVENTH STREET N.W.
WASHINGTON, DC. 20004

DIRECT TELEPHONE CALLS TO:

(please use Attorney's Docket No.) (202) 638-6666

JACOBSON, PRICE, HOLMAN & STERN
PROFESSIONAL LIMITED LIABILITY COMPANY

*Inventor(s) name must include at least one unabbreviated first or middle name.

	FULL NAME OF INVENTOR *	FAMILY NAME	GIVEN NAME	MIDDLE NAME
201	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE OR COUNTRY
				ZIP CODE
202	FULL NAME OF INVENTOR *	FAMILY NAME	GIVEN NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE OR COUNTRY
203	FULL NAME OF INVENTOR *	FAMILY NAME	GIVEN NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE OR COUNTRY
				ZIP CODE

I further declare that all statements made herein of my own knowledge are true and that all statement made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under section 1001 of Title 18 of the United States Code; and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 201 *	SIGNATURE OF INVENTOR 202 *	SIGNATURE OF INVENTOR 203 *
X <i>[Signature]</i>		
DATE X 14-12-01	DATE	DATE

Additional inventors are named on separately numbered sheets attached hereto.
© JPH&S 1995 8/95; 3/96; 5/98 (COPYING WITHOUT DELETIONS PERMITTED)